

Diaphragm Pumps for Air, Gases and Vapours

INNOVATIVE
TECHNOLOGY
WORLDWIDE



NEUBERGER



Series N 920 _ _ .29.18 Pumps

Diaphragm Vacuum Pumps

with KNF Stabilization System,
adjustable Flow Rate

Technical features:

- 100% oil-free transfer
- Pure transfer, evacuation and compression
- KNF Stabilization system, allows high suction speed even in the low-vacuum range
- Version for slightly aggressive or corrosive gases and vapours
- Maintenance-free
- Environmentally friendly
- Gastight, leakage rate approx. 6×10^{-3} mbar x l/s, not tested in serial production.

Dry-compression (oil-free) diaphragm pumps of the N 920 series are popular in laboratories for a wide range of applications. They pump and evacuate without contaminating the medium.

The high-performance N 920 vacuum pumps are ideally suited for all applications that need high suction power yet low absolute pressures. A number of technical innovations, including a diaphragm stabilization system, enable strong suction performance, especially in the low vacuum range.

An integrated potentiometer makes it easy to select the desired pumping rate by selecting the appropriate speed, so the pump can adapt to the requirements of a particular process. An analog signal input for external control is available as an option.

Technical data:

	N 920 AP.29.18	N 920 KT.29.18
Delivery (l/min) ¹⁾	max. 21	max. 20
Ultimate vacuum (mbar abs.)	1.5	2.0
Operating pressure (bar g)	0.5	0.5
Connectors for tube (mm)	ID 9	ID 9
Permissible gas and ambient temperature	+5...+40 °C	+5...+40 °C
Mains	90-230 V / 50-60 Hz	
Motor protection	IP 20	IP 20
Power P ₁	120 W	135 W
Operating current	1.3 A	1.4 A
Weight	10.5 kg	8.6 kg
Dimensions LxHxW (mm)	324/226/158	324/226/158
With thermal switch		

Motors with other voltages and frequencies on request.

¹⁾ at atm. pressure

Material in contact with the pumped media

Type/OrderNo.	Pump head	Diaphragm	Valves
N 920 AP.29.18	Aluminium	EPDM	EPDM
N 920 KT.29.18	PPS	PTFE-coated	FFPM


Accessories and spare parts

Description	Details	Order No.
Silencer/filter	G 1/8	007006
Small flange, stainless Steel	SF 16	046625
Adjustable delivery through speed regulation	over potentiometer or analog signal input	on request
Spares kit	for N 920 AP.29.18	057456
Spares kit	for N 920 KT.29.18	111905


Diaphragm Pumps for Air, Gases and Vapours

Dimensions and performance characteristics


Pump down time for 10 l receiver (at max. motor speed)

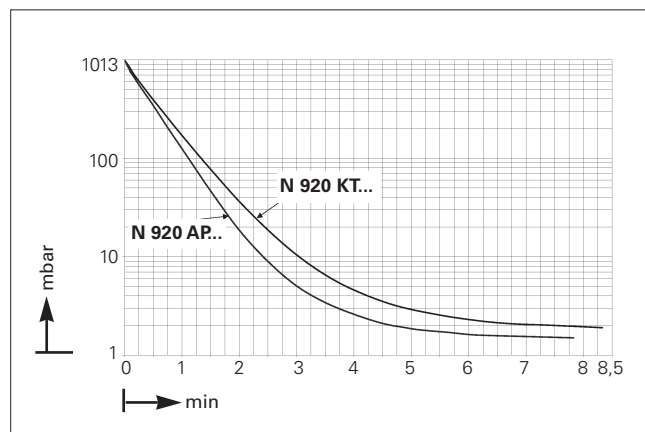

Performance characteristics (at max. motor speed)

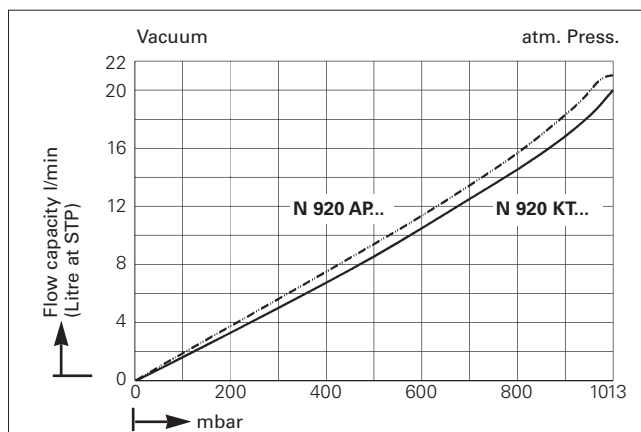

Suction pumping speed (at max. motor speed)

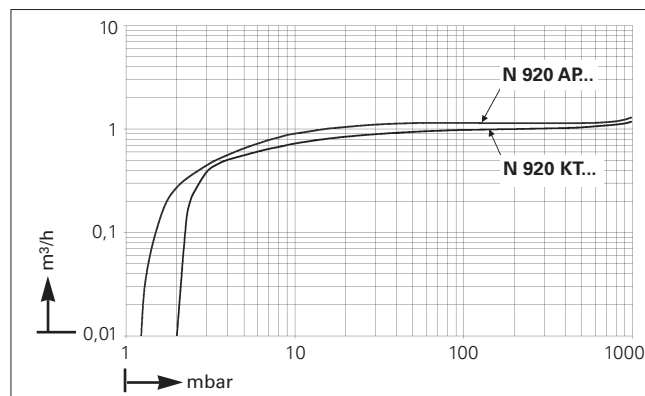

Dimensions (mm)

