

Technical Characteristics

- Aluminum alloy construction
- Smooth operation
- Maintenance free

Electric Motor


- Motors with IP 55 protection rating.
- class F insulation, suitable for operating with inverter (refer to FPZ)
- Thermal Protector (PTO) as standard

Options

- Special voltages (IEC 60038)
- Surface treatments
- Increased seal version

~3	[V] (Δ / Y)	[Hz]
IE2	230 / 400	50
	265 / 460	60
Wide Range	200 – 240 / 345 – 415	50
	220 – 280 / 380 – 480	60

Supply voltage - IE2 only at 50 Hz - Tolerance on the fixed voltage value $\pm 10\%$, in range $\pm 5\%$.

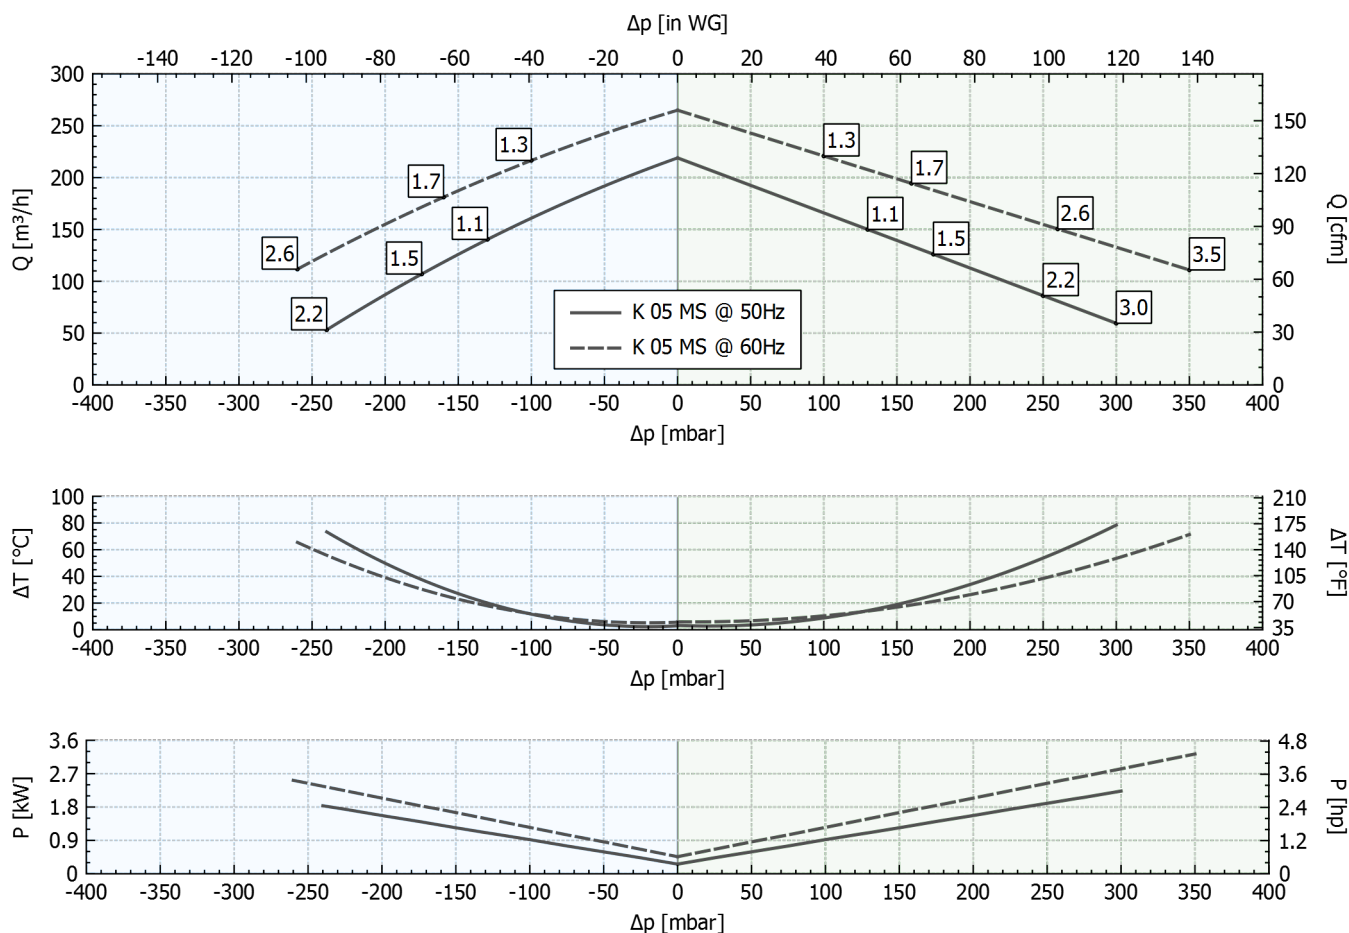

Performance Table

P _n [kW]	Frequency [Hz]	Δp_{\max} [mbar]		Q _{max} [m ³ /h]	Leq ¹ [dB(A)]	Weight [kg]	H ³ [mm]	Current Consumption (Δ / Y) [A]		Cos ϕ [-]	Speed [rpm]
		Suction	Compression					IE2 ²	Range		
1.1	50	130	130	219	67.2	25.5	295	2.63 / 4.56	2.60-2.76 / 4.50-4.78	0.73	2930
1.3	60	100	100	265	69.2	25.5	295	2.55 / 4.41	2.70-2.65 / 4.67-4.59	0.76	3530
1.5	50	175	175	219	67.2	25.5	295	3.25 / 5.62	3.47-3.30 / 6.00- 5.71	0.81	2900
1.7	60	160	160	265	69.2	25.5	295	3.10 / 5.37	3.53-3.10 / 6.11- 5.36	0.82	3505
2.2	50	240	250	219	67.2	27.5	320	4.58 / 7.93	4.97-4.64 / 8.60- 8.04	0.82	2890
2.6	60	260	260	265	69.2	27.5	320	4.56 / 7.90	5.33-4.55 / 9.23- 7.88	0.84	3485
3	50	-	300	219	67.2	34.5	365	6.27 / 10.8	6.88-6.36 / 11.9-11.0	0.82	2920
3.5	60	-	350	265	69.2	34.5	365	6.23 / 10.8	7.29-6.23 / 12.6-10.8	0.84	3515

1. Noise level measured at a distance of 1 m with ducted intake and delivery, in accordance with Standard ISO 3744.

2. IE2 only at 50 Hz.

3. See figure "dimensions" at following page.

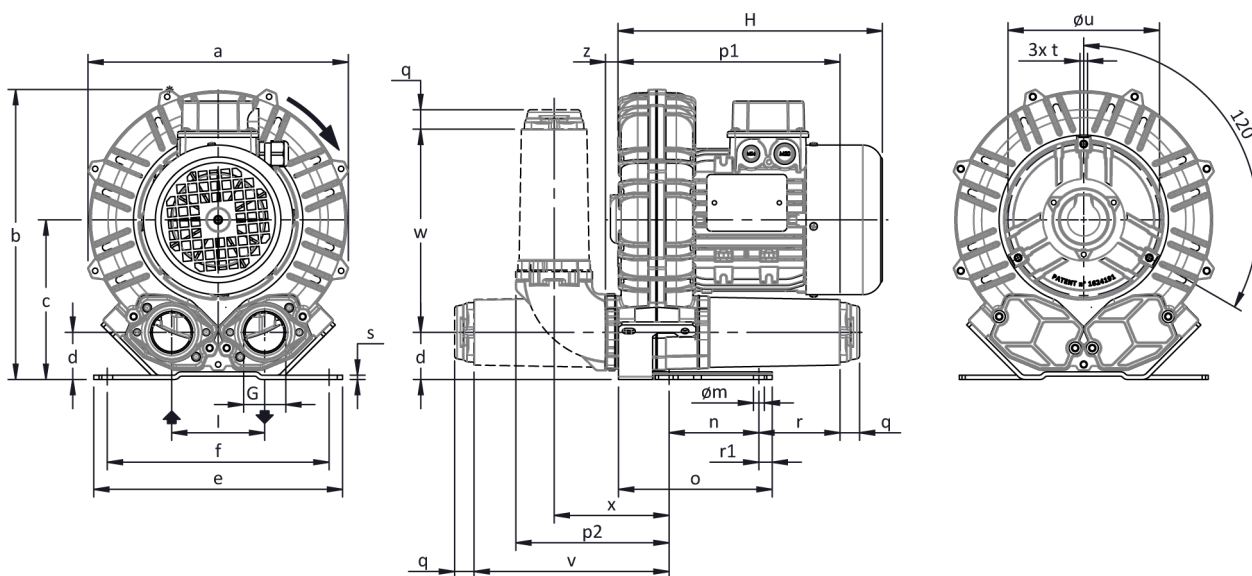
SUCTION
COMPRESSION


Tolerance on indicated values $\pm 10\%$.

Data subject to change without notice.

Curves referring to air at a temperature of 20 °C and atmospheric pressure of 1013 mbar (abs).

Dimensions



Configuration with a vertical silencer is only available with the CK accessory kit; for all assembly options refer to FPZ.

NOT Binding
 Dimensions in mm

a	b	c	d	d1	e	f	G	l	l1	l2	m	n	o	p1	p2	q	r	r1	s	t	u	v	w	x	y	z
327	365	200	54	-	325	260	G 2"	120	-	-	15	115	265	320	230	18	98	38.5	4	M8	200	330	285	184	-	19

INSTALLATION

- For proper operation of the machine, it must be provided with a suction FILTER and a vacuum/pressure limiting VALVE.
- Other accessories are available on request.
- Permissible ambient and fluid temperature in suction from -15 °C to +40 °C.
- Read the instruction manual carefully before installing the machine.